

11-01-00

PATENT

A

Attorney's Docket No. 00-8008

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D. C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Weiya Luo  
Anthony Wogrin Confrey  
Michael J. Turok  
Bruce Wilson

For: SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK

**Certification Under 37 CFR 1.10**

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 10/31/00 in an envelope as "Express Mail Post Office to Addressee" mailing label EL029404783US addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Mary E. Anza  
(typed or printed name of person mailing paper)

Mary E. Anza  
(Signature of person mailing paper)


Attorney's Docket No. 00-8008

Enclosed are:

[ 28 ] pages of specification and cover sheet  
 [ 14 ] pages of claims  
 [ 1 ] page of abstract  
 [ 11 ] sheets of formal drawings  
 [ 2 ] pages of declaration and power of attorney.  
 [ ] pages of assignment and assignment recordation form  
 [ 2 ] pages of information disclosure statement  
 [ 1 ] pages of form 1449  
 [ 2 ] references  
 [ 1 ] return postcard

CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	BASIC FEE \$710.00
TOTAL			
CLAIMS	53 - 20	33 x	\$18.00
INDEPENDENT			
CLAIMS	14 - 3	11 x	\$80.00
MULTIPLE DEPENDENT			
CLAIMS(S)		0 x	\$270.00
			0.00
		TOTAL FILING FEE	\$2184.00

- [x] Please charge my Deposit Account No. 07-2339 in the amount of **\$2184.00.** **This transmittal letter is submitted in duplicate.**
- [x] The Commissioner is hereby authorized to charge any additional fees under 37 CFR 1.16 and 1.17 which may be required by the papers submitted herewith or credit any overpayment to Account No. 07-2339.  
**This transmittal letter is submitted in duplicate.**

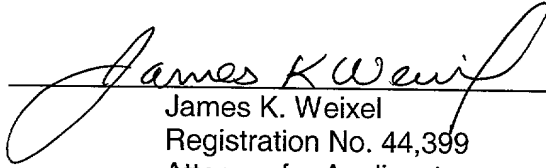  
James K. Weixel  
Registration No. 44,399  
Attorney for Applicant

Verizon Services Group  
600 Hidden Ridge, HQE03G13  
Irving, TX 75038  
Phone: (781) 466-2220  
Fax: (781) 466-4021

EXPRESS MAIL NO. EL029404783US

PATENT  
Docket No. 00-8008

**UNITED STATES PATENT APPLICATION**

**OF**

**Weiya LUO**

**Anthony Wogrin CONFREY**

**Michael L. TUROK**

**and**

**Bruce WILSON**

**FOR**

**SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK**

## SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK

FIELD OF THE INVENTION

The present invention relates generally to networks and, more particularly, to systems and methods for improving network management.

BACKGROUND OF THE INVENTION

Presently, the act of troubleshooting a network is a time-consuming task. Several solutions exist that aid network administrators in managing faults in a network by providing various tools for collecting and viewing individual faults (i.e., alarms) and performing a set of operations on them (e.g., acknowledge, clear, escalate, etc.). Typically, these views are variations on tabular displays (i.e., rows of alarms) and two-dimensional (2D) topology displays (i.e., network maps).

These tools are generally adequate for small-to-medium scale network operation centers, such as network operation centers with less than 100 alarms/per shift/per monitoring technician, moderate requirements on the frequency of network upgrades, etc. In environments with a large number of network elements and high alarm rates, however, these tools are often limited with respect to their ability to display relevant, real-time, fault information to monitoring technicians and network operation center's management. These limitations often invalidate the use of available tools in support of large-scale network operations.

Therefore, there exists a need for systems and methods that facilitate the management of a network.

SUMMARY OF THE INVENTION

A system and method consistent with the present invention address this and other needs by providing a mechanism that facilitates network management.

In accordance with the purpose of the invention as embodied and broadly described herein, a method for managing a network includes providing a first list of events occurring in the network; simultaneously providing a second list of events occurring in the network, the second list comprising a predetermined number of most recent events; and managing the network using the first and second lists.

In another implementation consistent with the present invention, a device for managing a network having a plurality of network elements includes a memory and a processor. The processor provides a list of identifiers associated with the plurality of network elements, where each network element identifier is associated with a state indication.

In yet another implementation consistent with the present invention, a method for managing a network having a plurality of network devices includes associating events in the network with one of the plurality of network devices; providing a geographical map, the geographical map displaying locations of each of the plurality of network devices and indicating which of the plurality of network devices are associated with at least one event; and managing the network using the geographical map.

In still yet another implementation consistent with the present invention, a device for managing a network having a plurality of network elements includes a

memory and a processor. The processor associates each network element with one of a plurality of logical planes and provides a network map. The network map displays relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes.

5 In still another implementation consistent with the present invention, a system for managing a network having a plurality of network elements includes a user device and a server. The user device provides a user with a list of network management options, the options including a network element diagnostic option, a network summary option, a geographical network management option, a three-dimensional  
10 network management option, transmits, in response to a selection of an option by the user, a request for current network information, provides the user with current network information according to the selected option. The server receives the request for current network information and transmits current network information to the user device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and, together with the description, explain the invention. In the drawings,

FIG. 1 illustrates an exemplary system in which systems and methods,  
20 consistent with the present invention, may be implemented;

FIG. 2 illustrates an exemplary server consistent with the present invention;

FIGS. 3A and 3B illustrate exemplary databases consistent with the present invention;

FIG. 4 illustrates an exemplary network operations center consistent with the present invention;

5        FIGS. 5-8 illustrate exemplary graphical user interfaces, consistent with the present invention, that facilitate network management operations;

FIG. 9 illustrates an exemplary process, consistent with the present invention, that improves management of a network; and

10        FIG. 10 illustrates an exemplary graphical user interface that may be provided to the user of a network operations center.

#### DETAILED DESCRIPTION

15        The following detailed description of the invention refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. Also, the following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

20        Systems and methods, consistent with the present invention, provide a mechanism to improve network management. The mechanism simplifies the manner in which a user (e.g., a network engineer) analyzes the operation of the network by providing the user with several graphical user interfaces. The graphical user interfaces allow the user to manage the network in a variety of ways.

#### EXEMPLARY SYSTEM

FIG. 1 illustrates an exemplary system 100 in which systems and methods,



consistent with the present invention, that improve management of a network may be implemented. In FIG. 1, system 100 includes a network 110, points of presence (POPs) 112-122, a server 130, a network operations center (NOC) 140, and a group of nodes 161-169 that may be directly connected to a POP 112-122 or connected via a customer network 151-153.

The network 110 may include, for example, the Internet, an intranet, a local area network (LAN), a metropolitan area network (MAN), a wide area network (WAN), or the like. In fact, the network 110 may include any type of network or combination of networks that permits routing of information from a particular source to a particular destination.

The POPs 112-122 may include conventional routers that decide, based on routing protocols (e.g., a frame relay protocol) and routing tables, how and where to send packets of information. Each POP 112-122 may also include one or more servers, such as an e-mail server or a World Wide Web server. Each POP 112-122 may be implemented via hardware and/or software.

The server 130 may include any type of computer system, such as a mainframe, minicomputer, or personal computer, capable of connecting to the network 110 to communicate with other devices, such as the network operations center 140, in the system 100. In alternative implementations, the server 130 may include a mechanism for directly connecting to the network operations center 140 or may be included within network operations center 140. The server 130 may also include a mechanism for communicating with the nodes 161-169. The server 130 may

transmit data over network 110 or receive data from the network 110 via a wired, wireless, or optical connection.

The network operations center 140 may include any type of computer system, such as a mainframe, minicomputer, personal computer, laptop, personal digital assistant, or the like, capable of connecting to the network 110. The network operations center 140 monitors and manages the operation of the network 110. The network operations center 140 may transmit data over the network 110 or receive data from the network 110 via a wired, wireless, or optical connection.

The customer networks 151-153 may include any type of local network, such as a LAN, MAN, WAN, or the like, that permits routing of information packets among the nodes connected to the respective network. The nodes 161-169 may include computers, such as workstations and servers, or any other type of device that has a network interface card (NIC), such as a printer or modem. Moreover, the nodes 161-169 may include devices, such as a personal digital assistant, that connect to a particular local network via a wireless connection.

The number of components illustrated in FIG. 1 is provided for simplicity. In practice, a typical system 100 may include a larger or smaller number of networks, POPs, servers, network operations centers, customer networks, and/or nodes.

#### EXEMPLARY SERVER CONFIGURATION

FIG. 2 illustrates an exemplary server 130 consistent with the present invention. The server 130 includes a bus 210, a processor 220, a memory 230, an input device 240, an output device 250, and a communication interface 260. The bus

210 may include one or more conventional buses that permit communication among the components of the server 130.

The processor 220 may include any type of conventional processor or microprocessor that interprets and executes instructions. The memory 230 may include a random access memory (RAM) or another type of dynamic storage device that stores information and instructions for execution by the processor 220; a read only memory (ROM) or another type of static storage device that stores static information and instructions for use by the processor 220; and/or some other type of magnetic or optical recording medium and its corresponding drive.

The input device 240 may include one or more conventional mechanisms that permit an operator to input information to the server 130, such as a keyboard, a mouse, a pen, voice recognition and/or biometric mechanisms, and the like. The output device 250 may include one or more conventional mechanisms that output information to the operator, including a display, a printer, a speaker, etc. The communication interface 260 may include any transceiver-like mechanism that enables the server 130 to communicate with other devices and/or systems. For example, the communication interface 260 may include mechanisms for communicating with the network operations center 140 via a network, such as network 110 (FIG. 1).

Execution of the sequences of instructions contained in memory 230 causes processor 220 to provide current network information as described below. In alternative embodiments, hard-wired circuitry may be used in place of or in

combination with software instructions to implement the present invention. Thus, the present invention is not limited to any specific combination of hardware circuitry and software.

5 The server 130, consistent with the present invention, provides information from one or more databases to a graphical user interface at the network operations center 140. The database may be stored at the server 130 (e.g., in memory 230) or externally from server 130.

FIGS. 3A and 3B illustrate exemplary databases 310 and 330, respectively, consistent with the present invention. It will be appreciated that server 130 may consist of other databases stored locally or distributed throughout the network 110.

10 As illustrated, database 310 includes a group of entries 305 that relate to events that occurred in the network 110. Each entry 305 may include information stored in one more of the following exemplary fields: an alarm type field 311, an optional number field 312, a state field 313, an action field 314, a time field 315, a date field 316, a network element (NE) identifier (ID) field 317, and an alarm description field 318. Database 310 may contain additional or different fields that would aid the server 130 in searching and sorting information in database 310. While information for a single network element (ABCDEFGH03H) is illustrated in FIG. 3A, it will be appreciated that database 310 may include information for more than one  
15  
20 network element.

The alarm type field 311 may store an identifier indicating the type of alarm associated with a network element. Typical alarms may include, for example, a fire

alarm, a port alarm, a line alarm, and the like. The alarm type field 311 may include a subfield (not shown) that stores a variable indicative of the severity of a corresponding alarm. Alarm severity categories might include critical, major, minor, and informational. The optional number field 312 may store an indication of the number of alarms represented by a single alarm icon.

The state field 313 may store an indication, represented by one or more letters, of the state of the alarm. For example, an "A" may represent an acknowledged alarm, an "E" may represent an escalated alarm state, an "AE" may represent an alarm that has been acknowledged and escalated, and a "C" may represent that an alarm has been cleared. The state field 313 may be left blank to indicate that an alarm has not been acknowledged, escalated, or cleared. The state field 313 may include one or more variables to indicate that the alarms associated with a network element are in the same state or in different states.

The action field 314 may store an indication of the type of action taken on an alarm. For example, an indication of "PA" may represent that activity for this particular alarm is planned. The action field 314 may be left blank when no action has been taken on the alarm. The time field 315 may store an indication of the time that the alarm occurred. The time may, for example, be stored in HH:MM:SS format or some other format. The date field 316 may store an indication of the date that the event occurred. The date may, for example, be stored in MM/DD/YYYY format or some other format.

The NE ID field 317 may store an identifier of the network element on which

the alarm occurred. The NE ID field 317 may, for example, store the identifier as a Common Language Location Identifier (CLLI). Other techniques for identifying the network element may alternatively be used.

The alarm description field 318 may store information describing the problem associated with the alarm. The alarm description field 318 may include, for example, an indication that a fire has been detected at a particular network element, an identity of a particular port that has failed, or the like. The database 310 may also include an acknowledgement field (not shown) that stores an identifier associated with the user (if any) that acknowledged the alarm.

Database 330 (FIG. 3B) may include a group of entries 325 that relate to events that occurred in the network 110. Each entry 325 may include information stored in one or more of the following exemplary fields: a network element field 331, an ID field 332, an alarms field 333, a tickets (TT) field 334, a held alarms (HA) field 335, a notes field 336, an incidents (IN) field 337, a users field 338, an escalated alarm field 339, and a last modified field 340. Database 330 may include additional or different fields that would aid the server 130 in searching and sorting information in the database 330.

The network element field 331 may store one or more identifiers representing the network element type and its alarm state. A typical network element type may include, for example, a frame relay switch, an Asynchronous Transfer Mode (ATM) switch, an Internet Protocol (IP) router, or the like. The network element type may be associated with an identifier representing the network element's alarm state. Typical

alarm states could include critical, major, minor, and informational. The ID field 332 may store an identifier of the network element. Similar to database 310, the identifier may be stored as a CLLI.

The alarms field 333 may store information regarding the states of the alarms associated with a particular network element. As illustrated, the alarms field 333 may include a critical state (C) subfield, a major state (MA) subfield, a minor state (MI) subfield, and an informational state (I) subfield. The critical state, major state, minor state, and informational state subfields may store a value indicative of the number of alarms associated with a particular network element that is in that particular state.

The alarms field 333 may also include a total alarms subfield that stores a value representing the total number of alarms associated with a particular network element. As illustrated, the network element ABCDEFG03H is associated with 130 total alarms, of which 32 are critical, 35 are major, 54 are minor, and 9 are informational.

The tickets field 334 may store an indication of the number of outstanding trouble tickets that are associated with a network element. The held alarms field 335 may store an indication of the number of outstanding alarms that are on hold. The notes field 336 may store an indication of the number of outstanding notes associated with a particular network element. The notes field 336 may also store the actual notes for the particular network element.

The incidents field 337 may store an indication of the number of outstanding incident reports associated with a network element. The users field 338 may store an indication of the number of operators that are currently monitoring a particular

network element. The escalated alarms field 339 may store an indication of the number of escalated alarms associated with a particular network element. The last modified field 340 may store the date and time of the last time in which the information in fields 332-339 for a particular network element has been modified.

5

## EXEMPLARY NETWORK OPERATIONS CENTER

FIG. 4 illustrates an exemplary network operations center 140 consistent with the present invention. The network operations center 140 may include a bus 402, a processor 404, a main memory 406, a ROM 408, a storage device 410, an output device 412, an input device 414, and a communication interface 416. The bus 402 may include one or more conventional buses that permit communication among the components of the network operations center 140.

The processor 404 may include any type of conventional processor or microprocessor that interprets and executes instructions. The main memory 406 may include a RAM or another type of dynamic storage device that stores information and instructions for execution by the processor 404. Main memory 406 may also be used to store temporary variables or other intermediate information during execution of instructions by processor 404.

ROM 408 may include a conventional ROM device and/or another type of static storage device that stores static information and instructions for processor 404.

20

The storage device 410 may include a magnetic disk or optical disk and its corresponding drive and/or some other type of magnetic or optical recording medium and its corresponding drive for storing information and instructions.



The output device 412 may include one or more conventional mechanisms that output information to an operator, including a display, a printer, a speaker, etc. The input device 414 may include one or more conventional mechanisms that permit the operator to input information to the system 140, such as a keyboard, a mouse, a pen, voice recognition and/or biometric mechanisms, etc. The communication interface 416 may include any transceiver-like mechanism that enables the network operations center 140 to communicate with other devices and/or systems, such as the server 130. For example, the communication interface 416 may include a modem or an Ethernet interface to a network. Alternatively, communication interface 416 may include other mechanisms for communicating via a network, such as network 110.

The network operations center 140 improves network troubleshooting in response to processor 404 executing sequences of instructions contained in a computer-readable medium, such as memory 406. Such instructions may be read into memory 406 from another computer-readable medium, such as a storage device 410, or from a separate device via communication interface 416. A computer-readable medium may include one or more storage devices and/or carrier waves. Execution of the sequences of instructions contained in memory 406 causes processor 404 to perform the process steps that will be described hereafter. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions to implement the present invention. Thus, the present invention is not limited to any specific combination of hardware circuitry and software.

The network operations center 140, consistent with the present invention, provides network management information to an operator via a group of graphical user interfaces. The graphical user interfaces may be provided to the operator at, for example, the network operation center's output device 412 or at an output device located remotely therefrom.

FIGS. 5-8 illustrate exemplary graphical user interfaces, consistent with the present invention, that facilitate network management operations. FIG. 5 illustrates a first exemplary graphical user interface 500 consistent with the present invention. In FIG. 5, the exemplary graphical user interface 500 provides an active alarm interface that includes an active alarm window 505 and a most recent alarm window 510 for one or more network elements. For simplicity, the active alarm interface 500 provides alarms associated with a single network element, namely network element ABCDEFG03H.

The active and most recent alarm windows 505 and 510 include the following exemplary fields: a type field, a number (NO) field, a state (ST) field, an action (AT) field, a time field, a date field, a network element (NE) identifier (ID) field, a detailed alarm description field, and an acknowledge field. The type field may include an identifier, in the form of one or more words or icons, indicating the type of alarm associated with a network element. As illustrated, typical alarms may include, for example, a fire alarm, a port alarm, a line alarm, and the like. To illustrate the severity of a particular alarm, the identifiers may be of different colors. For example, dark red may be used to represent a critical alarm, red may be used to represent a

major alarm, yellow may be used to represent a minor alarm, and blue may be used to represent an informational alarm.

The number field may include an indication of the number of alarms represented by a single alarm identifier in the type field. The state field may include an indication, represented by one or more letters, of the state of a particular alarm. For example, an "A" may represent an acknowledged alarm, an "E" may represent an escalated alarm state, an "AE" may represent an alarm that has been acknowledged and escalated, and a "C" may represent that an alarm has been cleared. Uppercase letters in the state field may indicate that all alarms associated with a particular network element are in the same state. Lowercase letters may indicate that some, but not all, of the alarms are in the specified state. The state field may be left blank to indicate that an alarm has not been acknowledged, escalated, or cleared. It will be appreciated that other indications may alternatively be used.

The action field may include an indication of the type of action taken on an alarm. For example, an indication of "PA" may represent that activity for this particular alarm is planned. The action field may be left blank when no action has been taken on the alarm. The time field may include the time that a particular alarm occurred. The time may, for example, be represented in HH:MM:SS format or any other format. The date field may include the date that the alarm occurred. The date may, for example, be represented in MM/DD/YYYY format or any other format.

The NE ID field may include an identifier of the network element on which the alarm occurred. The NE ID field may, for example, include the identifier as a

Common Language Location Identifier (CLLI). Other techniques for identifying the network element may alternatively be used. If the active and most recent alarm windows 505 and 510 include information for a single network element, as in FIG. 5, the NE ID field may be removed.

5           The alarm description field may include information describing the problem associated with a particular alarm. The alarm description field may include, for example, an indication that a fire has been detected at a particular network element, an identity of a particular port that has failed, and the like.

10           The acknowledge field may include one or more initials of an operator that has acknowledged a particular alarm. The active and most recent alarm windows 505 and 510 may include other fields (not shown) that aid a network operator in managing or troubleshooting a network, such as network 110.

15           The active alarm window 505 provides the operator with a listing of active alarms. As new alarms occur in the network 110, the older alarms are scrolled out of the window 505. Through the use of the scroll bar, the operator may view alarms that have scrolled out of the window 505.

20           The most recent alarm window 510 displays the most recent alarms in the network 110. The number of most recent alarms displayed may be configured by the operator. When monitoring large networks with high alarm volume, the most recent alarm window 510 ensures that critical alarms (e.g., outages) always show up in the visible area on the operator's screen. Conventional troubleshooting techniques typically have a single active workspace, such as window 505, to view alarms and act

on them. It is likely that the newly arrived alarm will get scrolled-off from the visible area in the window, as operators are working on alarms that already exist in the window.

If an operator wants to act on a new alarm immediately upon arrival (e.g.,  
5 acknowledge it), the operator can select the alarm row in the most recent alarm window 510 and the same alarm instance is automatically selected in the active alarm window 505. The operator may then proceed to acknowledge the alarm in the active alarm window 510.

FIG. 6 illustrates an alternative exemplary graphical user interface 600  
10 consistent with the present invention. As illustrated, the graphical user interface 600 includes a trouble information matrix that provides an operator with a summary view of each network element in a system, such as system 100. The trouble information matrix 600 may include the following exemplary fields: a network element (NE) field,  
15 an identifier (ID) field, an alarms field, a tickets field, a held alarms field, a notes field, an incidents (IN) field, a users (US) field, an escalated alarms (EA) field, and a last modified field.

The network element field may include one or more identifiers, in the form of one or more words or icons, representing a network element type and its alarm state. As illustrated, network element types may include, for example, a frame relay (FR)  
20 switch, an Asynchronous Transfer Mode (ATM) switch, an Internet Protocol (IP) router, or the like. To readily identify the severity of the alarms associated with a particular network element, the network element identifiers may be associated with a

color. For example, dark red may be used to represent a critical alarm, red may be used to represent a major alarm, yellow may be used to represent a minor alarm, and blue may be used to represent an informational alarm. When a network element is associated with alarms of differing severity, the network element may be associated with a color indicative of the alarm having the highest severity.

The ID field may include an identifier of the network element. In an implementation consistent with the present invention, the identifier may be displayed as a CLLI. The alarms field may include information regarding the states of the alarms associated with a particular network element. The alarms field may include a critical state (CR) subfield, a major state (MAJ) subfield, a minor state (MIN) subfield, an informational state (INFO) subfield, and a total alarms (TOTAL) subfield.

The critical state, major state, minor state, and informational state subfields may include a value indicative of the number of alarms associated with a particular network element that is in that particular state. The total alarms subfield may include a value indicative of the total number of alarms associated with a particular network element. As illustrated, the network element ABCDEFG03H is associated with 130 total alarms, of which 32 are critical, 35 are major, 54 are minor, and 9 are informational.

The tickets field may include an indication of the number of outstanding trouble tickets that are associated with a network element. The held alarms field may include an indication of the number of outstanding alarms, associated with a network element, that are on hold. The notes field may include an indication of the number of

outstanding notes associated with a particular network element.

The incidents field may include an indication of the number of outstanding incident reports associated with a network element. The users field may include an indication of the number of operators that are currently monitoring the network element. The escalated alarms field may include an indication of the number of alarms associated with a particular network element that have an escalated status. The last modified field may include the date and time of the last time in which information for a particular network element has been modified.

The trouble information matrix 600 provides an operator with the status of events associated with selected network elements and allows the operator to quickly access information in a way not available in conventional systems. For example, selecting a network element in the network element field or on one of the numbers in the alarm field, the operator may be taken to the active alarm interface 500 where an alarm may be acknowledged or acted upon. An operator may select a network element or alarm number by, for example, by a left-click or double-click operation. By selecting a number in the tickets field, the operator may be provided, via, for example, a trouble ticket viewer, with a more detailed view of the the trouble tickets associated with a particular network element.

By selecting a number in the held alarms field, the operator may be taken to a more detailed view of the alarms that are currently on hold for a particular network element. Similarly, by selecting a number in the notes field, the operator may be taken to a notes viewer in which the operator can read the notes associated with a

particular network element. More detailed views of the information in the users and escalated alarms fields may be obtained by selecting a number in those fields. For example, an operator may be provided with a list of names and contact information for users that are monitoring a particular network node by selecting the users number in  
5 the users field.

FIG. 7 illustrates another exemplary graphical user interface 700 consistent with the present invention. In FIG. 7, the graphical user interface 700 includes a geographical map 710 that illustrates points of presence and individual network elements according to their geographical location. The graphical user interface 700 also visually maps outstanding trouble tickets to objects displayed in the geographical map 710. If a particular point of presence has outstanding trouble tickets on any network elements housed therein, a small "T" icon may be displayed next to the point  
10 of presence icon.

By selecting a particular point of presence or network element that is associated with a trouble ticket, the graphical user interface 700 may provide an operator with a number of options. In one option, the graphical user interface 700 may provide the operator with a more detailed view 720 of the geographical area affected. The operator may also be provided with a "Show Trouble Tickets" menu that allows for trouble tickets to be viewed in a trouble ticket management system of  
15 the operator's choice (e.g., Remedy). Similar viewing options may be provided for individual network elements as users "drill down" into a point of presence by selecting  
20 the point of presence on the geographical map 710.



FIG. 8 illustrates yet another exemplary graphical user interface 800 consistent with the present invention. In FIG. 8, the graphical user interface 800 allows an operator to visualize and navigate a network, such as network 110, in three dimensions. The graphical user interface 800 may, for example, be provided as a standard Web browser virtual reality modeling language (VRML) plug-in.

The graphical user interface 800 includes a network topology window 810, navigation tools 820, and management tools 830. In the network topology window 810, the network may be broken down into a group of logical network planes (e.g., Switching planes, Transmission planes, Signaling planes, Customer Access planes, etc.). This provides a network operator with a convenient way to analyze a particular portion of the network of interest to that operator.

The network topology window 810 also illustrates how the individual logical planes and the network elements within those planes are interconnected. A network operator of the system may for example, define the logical planes and the association between planes and network elements. Network elements displayed in the network topology window 810 may be colored according to the their alarm status in real-time. By displaying the alarm status of network elements in the network and the interconnection of those network elements to other network elements in the network 110, network operators may quickly determine problem areas and how they affect the rest of the network 110.

The navigation tools 820 allow a network operator to "walk" the network in the network topology window 810. The operator may zoom in and out in order to get

a closer or more distant view of the network, rotate the logical planes in the network, and the like.

5 The management tools 830 include a NetPlanes button, a Deselect button, a LiveAlarms button, an AlarmMatrix button, a PerfGraph button, a Trace button, and a Quit button. The NetPlanes button allows for different logical planes to be toggled in and out of the network topology window 810. The operator may select one or more network elements in the network topology window 810 by, for example, clicking on them. The Deselect button allows for selected network elements to be deselected. As  
10 in more traditional two-dimensional network topology displays, an operator may select network elements in 3D space and invoke operations on them or open other informational and real-time windows by clicking on the "LiveAlarms," "AlarmMatrix," or "PerfGraph" buttons. By selecting a network element on one plane and clicking on the "Trace" button, all "affected" network elements and links on other planes and links between planes will be highlighted. The "Quit" button exits the 3D  
15 view and returns to a login screen.

Unlike standard two-dimensional map representations of network topologies, the graphical user interface 800 offers the following unique advantages. The network topology window 810 automatically controls the level of detail of displayed information. For example, as operators "walk the network," the labels for network  
20 elements in the current locale of the operator's view get displayed automatically. This allows for uncluttered displays of large network data sets with only relevant information shown in greater detail.

The network topology window 810 allows operators to visualize network topology more naturally. The network topology window 810 shows relationships between logical layers of the network and helps operators visually relate faults to network topology faster. Once a problem is isolated to a particular network layer, an operator can further focus on network elements on this layer and turn off displaying other layers.

Unlike conventional network displays, operators can stay within the context of a single web browser frame as they navigate the network. They do not have to "pop-up" numerous windows on the desktop to "drill down the network" (e.g., going from a customer circuit view into the SONET ring that carries that circuit).

#### EXEMPLARY PROCESSING

FIG. 9 illustrates an exemplary process, consistent with the present invention, to improve management of a network, such as network 110. Processing may begin with a user (e.g., a network engineer) initializing a management process at the network operations center 140 [act 905]. This initialization procedure may involve the user double-clicking an icon on a screen at the network operations center 140, typing in a command, or some other well-known technique. The initialization procedure may also involve some type of well-known log-in process by which the user may enter an identifier and password that are authenticated by the network operations center 140.

The network operations center 140 may then provide a menu of possible network management options [act 910]. FIG. 10 illustrates an exemplary graphical

user interface 1000 that may be provided to the user of network operations center 140.

As illustrated, the graphical user interface 1000 requests the selection of a network management option. The options may include a network element management option, a trouble information matrix option, a geomap-integrated trouble view option, and a three-dimensional (3D) network topology management option.

Assume that the user selects the network element management option [act 920]. The network operations center 140 may request the user to provide the identity a network element of interest [act 922]. Upon entry of a network element identifier, the network operations center 140 may request information about the network element from the server 130 [act 924]. In response, the server 130 may transmit information, for example, from database 310, that pertains to the requested network element [act 926].

Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 928]. The information may be provided, for example, via the graphical user interface 500 illustrated in FIG. 5. As illustrated therein, the graphical user interface 500 may provide the user with detailed alarm information for a particular network element (e.g., ABCDEFG03H). The user may monitor alarms associated with the requested network element in an active alarm window 505. The user may also monitor alarms that have most recently occurred in a most recent alarms window 510. The user may use the graphical user interface 500 to manage the network [act 960].

Assume that the user selects the trouble information matrix option [act 930].

Upon the selection of the trouble information matrix option, the network operations center 140 may request current network information from the server 130 [act 932]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 934].

5           Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 936]. The information may be provided, for example, via the graphical user interface 600 illustrated in FIG. 6. As illustrated therein, the graphical user interface 600 may provide the user with a summary view of the state of each network element in the network. This allows the user to readily determine the number of alarms associated with a particular network element and the severity of those alarms. The graphical user interface 600 simplifies management of large-scale telecommunications networks by allowing the user to quickly retrieve detailed information about any network element in the network. The user may use the graphical user interface 600 to manage the network [act 960].

          Assume that the user selects the geomap-integrated trouble view option [act 940]. Upon the selection of the geomap-integrated trouble view option, the network operations center 140 may request current network information from the server 130 [act 942]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 944].

          Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 946]. The

information may be provided, for example, via the graphical user interface 700 illustrated in FIG. 7. As illustrated therein, the graphical user interface 700 may provide the user with geographic locations of points of presence and network elements in the network. The graphical user interface 700 may also map trouble tickets to objects in the network. The user may readily determine the geographic location of alarms in the network. The user may use the graphical user interface 700 to manage the network [act 960].

Assume that the user selects the 3D network topology option [act 950]. Upon the selection of the 3D network topology option, the network operations center 140 may request current network information from the server 130 [act 952]. In response, the server 130 may transmit information from database 330 and/or database 310 to the network operations center 140 [act 954].

Upon receipt of the information from server 130, the network operations center 140 may provide the user with the requested information [act 956]. The information may be provided, for example, via the graphical user interface 800 illustrated in FIG. 8. As illustrated therein, the graphical user interface 800 may provide the user with a real-time, three-dimensional model of the network. Network elements in the model may be shaded in order to depict current states of the network elements. The graphical user interface 800 provides the user with the ability to navigate through the network, to represent the network as a logical layer of planes (e.g., customer access, switching, transmission, etc.), and to readily determine how a particular alarm affects the overall network. The user may use the graphical user

interface 800 to manage the network [act 960].

### CONCLUSION

Systems and methods, consistent with the present invention, provide a mechanism to improve network management. The mechanism provides a user (e.g., a network engineer) with several graphical user interfaces with which to manage network operations. The graphical user interfaces allow the user to easily assimilate a large amount of information thereby facilitating the management of any sized network.

The foregoing description of exemplary embodiments of the present invention provides illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention. For example, the described implementation includes software and hardware, but elements of the present invention may be implemented as a combination of hardware and software, in software alone, or in hardware alone. Also, while a series of steps has been described with regard to FIG. 9, the order of the steps may be varied in other implementations consistent with the present invention. No element, step, or instruction used in the description of the present application should be construed as critical or essential to the invention unless explicitly described as such.

The scope of the invention is defined by the following claims and their equivalents.

WHAT IS CLAIMED IS:

1. A method for managing a network, comprising:  
providing a first list of events occurring in the network;  
simultaneously providing a second list of events occurring in the  
network, the second list comprising a predetermined number of most recent events;  
5 and  
managing the network using the first and second lists.
2. The method of claim 1 further comprising:  
setting a number of events to be provided in the second list.
3. The method of claim 1 further comprising:  
selecting an event in the second list, and  
automatically selecting, in response to selecting an event in the second  
list, an equivalent event in the first list.
4. The method of claim 3 further comprising:  
acknowledging the equivalent event in the first list.
5. The method of claim 1 wherein the first and second lists include events  
relating to at least one network element in the network.



6. A system for managing a network, comprising:  
means for providing a first list of events in the network;  
means for simultaneously providing a second list of events in the  
network, the second list comprising a predetermined number of most recent events;

5 and

means for managing the network using the first and second lists.

7. A system for managing a network, comprising:  
a user device configured to transmit a request for current network  
information, provide a first list of events occurring in the network, and simultaneously  
provide a second list of events occurring in the network, the second list comprising a

5 number of most recent events; and

a server configured to receive the request for current network  
information and provide the current network information to the user device.

8. The system of claim 7 wherein the request includes at least one  
network identifier.

9. The system of claim 8 wherein, when providing the current network  
information, the server is configured to:

provide current network information relating to the at least one network identifier.

10. The system of claim 7 wherein the number of most recent events provided in the second list is set by a user.

11. The system of claim 10 wherein the user device is further configured to:

select an event in the second list, and

automatically select, in response to selecting an event in the second list,

5 an equivalent event in the first list.

12. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network, the method comprising:

providing a first list of events in the network;

5 simultaneously providing a second list of events in the network, the second list comprising at least one most recent event; and

managing the network using the first and second lists.

13. The computer-readable medium of claim 12 wherein the method further comprises:

setting a number of events to be provided in the second list.

14. A device for managing a network having a plurality of network elements, comprising:

a memory configured to store instructions; and

a processor configured to execute the instructions to provide a list of

5 identifiers associated with the plurality of network elements, each network element identifier being associated with a state indication.

15. The device of claim 14 wherein the processor is further configured to:

provide, for each network element identifier, a total number of alarms associated with each of the plurality of network elements.

16. The device of claim 15 wherein the processor is further configured to:

provide, for each network element identifier, a value indicating a quantity of major alarms associated with a respective network element, and

5 provide, for each network element identifier, a second value indicating a quantity of minor alarms associated with a respective network element.

17. The device of claim 14 wherein the processor is further configured to:

provide, for each network element identifier, a value representing a number of users monitoring a respective network element.

18. The device of claim 17 wherein the processor is further configured to:  
provide, in response to selecting the value representing the number of  
users monitoring a network element, contact information for each user.

19. The device of claim 14 wherein the processor is further configured to:  
provide, for each network element identifier, a value representing a  
number of escalated alarms associated with a respective network element.

20. A method for managing a network having a plurality of network  
elements, comprising:  
receiving a request for network information;  
providing a list of network element identifiers associated with the  
5 plurality of network elements, the list indicating a state of each of the plurality of  
network elements; and  
managing the network using the list.

21. The method of claim 20 wherein the list further indicates a number of  
escalated alarms associated with each of the plurality of network elements.

22. The method of claim 20 wherein the list further includes a number of  
users currently monitoring each of the plurality of network elements.

23. The method of claim 20 wherein the list further includes at least one of a total number of alarms associated with each of the plurality of network elements, a total number of trouble tickets associated with each of the plurality of network elements, a total number of held alarms associated with each of the plurality of network elements, and a network element type indication for each of the plurality of network elements.

24. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network elements, the method comprising:

receiving a request for network information;

providing a list of network element identifiers associated with the plurality of network elements, the list indicating a state of each of the plurality of network elements; and

managing the network using the list.

25. The computer-readable medium of claim 24 wherein the list further includes at least one of a value representing a number of escalated alarms associated with each of the plurality of network elements, a value representing a number of users currently monitoring each of the plurality of network elements, a total number of alarms associated with each of the plurality of network elements, a total number of trouble tickets associated with each of the plurality of network elements, a total

number of held alarms associated with each of the plurality of network elements, and  
a network element type indication for each of the plurality of network elements.

26. A method for managing a network having a plurality of network  
devices, comprising:

associating events in the network with one of the plurality of network  
devices;

5 providing a geographical map, the geographical map displaying  
locations of each of the plurality of network devices and indicating which of the  
plurality of network devices are associated with at least one event; and  
managing the network using the geographical map.

27. The method of claim 26 wherein the network devices include points of  
presence and network elements.

28. The method of claim 26 further comprising:  
selecting a network device having at least one associated event; and  
providing information regarding the at least one associated event.

29. The method of claim 26 wherein the geographical map further displays  
a state of each network device.

30. A device for managing a network having a plurality of network devices, comprising:

a memory configured to store instructions; and

a processor configured to execute the instructions to associate an event

5 in the network with a network device and provide a geographical map, the geographical map displaying locations of network devices and indicating which network devices are associated with at least one event.

31. The device of claim 30 wherein the network devices include points of presence and network elements.

32. The device of claim 30 wherein the processor is further configured to: provide event information in response to selection of a network device having at least one event associated therewith.

33. The device of claim 30 wherein the processor is further configured to: display a state of each network device on the geographical map.

34. A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network devices, the method comprising:

- 5      associating events in the network with one of the plurality of network devices;
- providing a geographical map, the geographical map displaying locations of each of the plurality of network devices and indicating which of the plurality of network devices are associated with at least one event; and
- managing the network using the geographical map.

35.      The computer-readable medium of claim 34 wherein the network devices include points of presence and network elements.

36.      The computer-readable medium of claim 34 wherein the method further comprises:

         selecting a network device having at least one associated event; and

         providing information regarding the at least one associated event.

37.      The computer-readable medium of claim 34 wherein the geographical map further displays a state of each network device.

38.      A device for managing a network having a plurality of network elements, comprising:

         a memory configured to store instructions; and



a processor configured to execute the instructions to associate each  
5 network element with one of a plurality of logical planes and provide a network map,  
the network map displaying relationships between the plurality of logical planes and  
those network elements associated with the plurality of logical planes.

39. The device of claim 38 wherein the plurality of logical planes includes  
one or more of a transmission plane, a switching plane, a customer access plane, and a  
signaling plane.

40. The device of claim 38 wherein the processor is further configured to:  
allow a user to navigate through the network map.

41. The device of claim 38 wherein the processor is further configured to:  
display a state of each network element in the network map.

42. The device of claim 38 wherein the network map is a three-  
dimensional network map.

43. A method for managing a network having a plurality of network  
elements, comprising:

associating each of the plurality of network elements with one of a  
plurality of logical planes;

- 5            providing a network map, the network map displaying relationships between the plurality of logical planes and those network elements associated with the plurality of logical planes; and
- managing the network using the network map.

44.        The method of claim 43 wherein the plurality of logical planes includes one or more of a transmission plane, a switching plane, a customer access plane, and a signaling plane.

45.        The method of claim 43 wherein the managing includes:
- allowing a user to navigate through the network map.

46.        The method of claim 43 wherein the providing includes:
- displaying a state of each network element in the network map.

47.        The method of claim 43 wherein the network map is a three-dimensional network map.

48.        A computer-readable medium containing instructions for controlling at least one processor to perform a method for managing a network having a plurality of network elements, the method comprising:

associating each of the plurality of network elements with one of a  
5 plurality of logical planes;  
providing a network map, the network map displaying relationships  
between the plurality of logical planes and those network elements associated with the  
plurality of logical planes; and  
managing the network using the network map.

49. A system for managing a network having a plurality of network  
elements, comprising:

a user device configured to provide a user with a list of network  
management options, the options including a network element diagnostic option, a  
5 network summary option, a geographical network management option, a three-  
dimensional network management option, transmit, in response to a selection of an  
option by the user, a request for current network information, provide the user with  
current network information according to the selected option; and  
a server configured to receive the request for current network  
10 information and transmit current network information to the user device.

50. The system of claim 49 wherein the user device is configured to:  
provide, in response to a selection of the network element diagnostic  
option, a first list of events occurring in the network, and

simultaneously provide a second list of events occurring in the  
5 network, the second list comprising a predetermined number of most recent events.

51. The system of claim 49 wherein the user device is configured to:  
provide, in response to a selection of the network summary option, a  
list of network element identifiers associated with the plurality of network elements,  
each network element identifier being associated with a state indication.

52. The system of claim 49 wherein the user device is configured to:  
associate, in response to a selection of the geographical network  
management option, events in the network with one of the plurality of network  
devices, and  
5 provide a geographical map, the geographical map displaying locations  
of each of the plurality of network devices and indicating which of the plurality of  
network devices are associated with at least one event.

53. The system of claim 49 wherein the user device is configured to:  
associate, in response to a selection of the three-dimensional network  
management option, each of the plurality of network elements with one of a plurality  
of logical planes, and



ABSTRACT

A system (130) improves network management. The system (130) associates an event in the network with a network device and provides a geographical map (710).

The geographical map (710) displays locations of network devices and indicates

5 which network devices are associated with at least one event.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
219


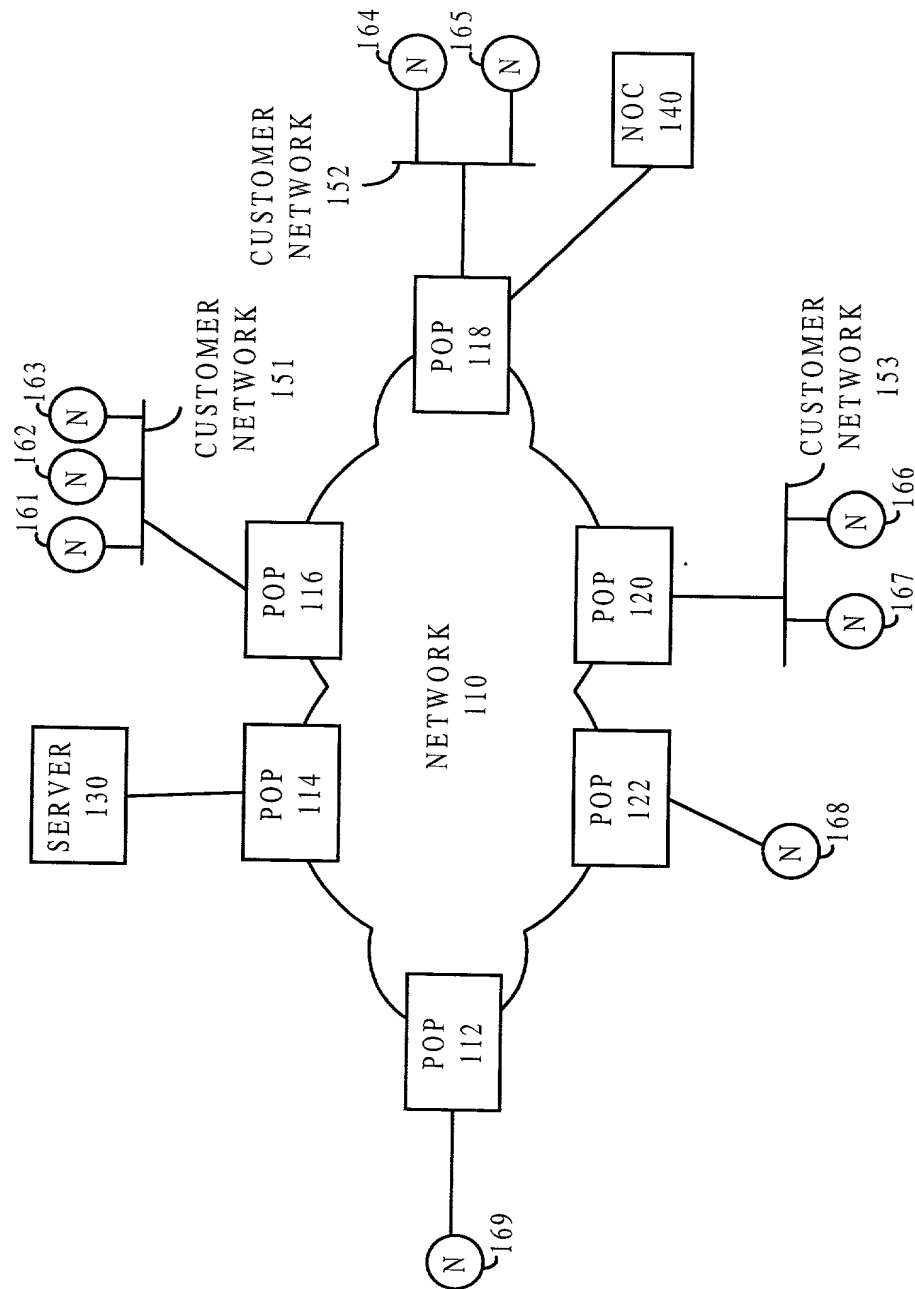


FIG. 1



**FIG. 2**

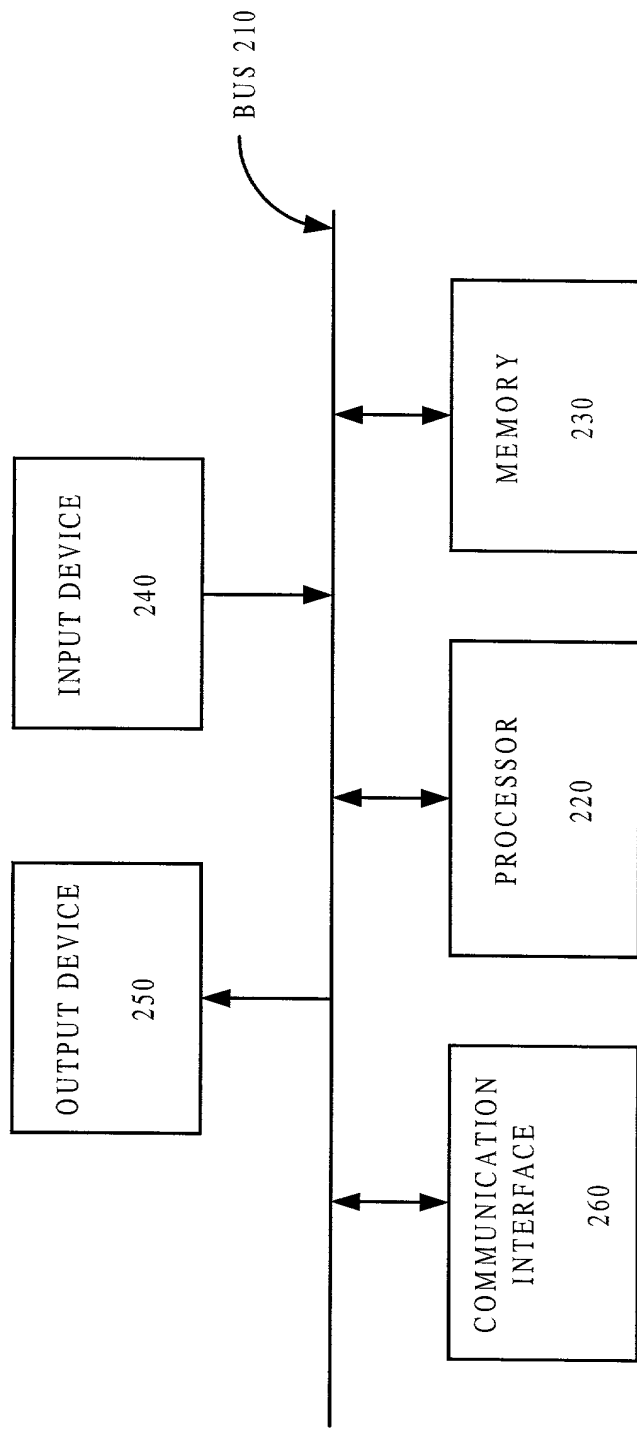

ALARM TYPE	NUMBER	STATE	ACTION	TIME	DATE	NE ID	ALARM DESCRIPTION
311	312	313	314	315	316	317	318
FIRE	5	E		18:34:22	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	1	E		18:34:24	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	1	AE		18:34:28	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
PORT	1	E		18:34:28	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
LINE	2	A	PA	18:34:29	11/02/99	ABCDEFG03H	ALARM DESCRIPTION
PORT	1	E		18:34:29	11/02/99	ABCDEFG03H	ALARM DESCRIPTION

FIG. 3A

330

NE 331	ID 332	ALARMS 333					TT 334	HA 335	NOTES 336	IN 337	USERS 338	EA 339	LAST MODIFIED 340
		C	MA	MI	I	TOTAL							
FR SWITCH	ABCDEFG03H	32	35	54	9	130	20		14		2		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG04H	21	98	20	10	149	21	3	2	1	4	1	11/02/1999 11:39:42
IP ROUTER	ABCDEFG05H	0	0	0	95	95	25		4		1		11/02/1999 11:38:34
FR SWITCH	ABCDEFG06H	0	0	0	87	87					1		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG07H	0	0	0	64	64	2				1		11/02/1999 11:38:34
ATM SWITCH	ABCDEFG08H	0	20	0	0	20			1		1		11/02/1999 11:37:51

325

FIG. 3B

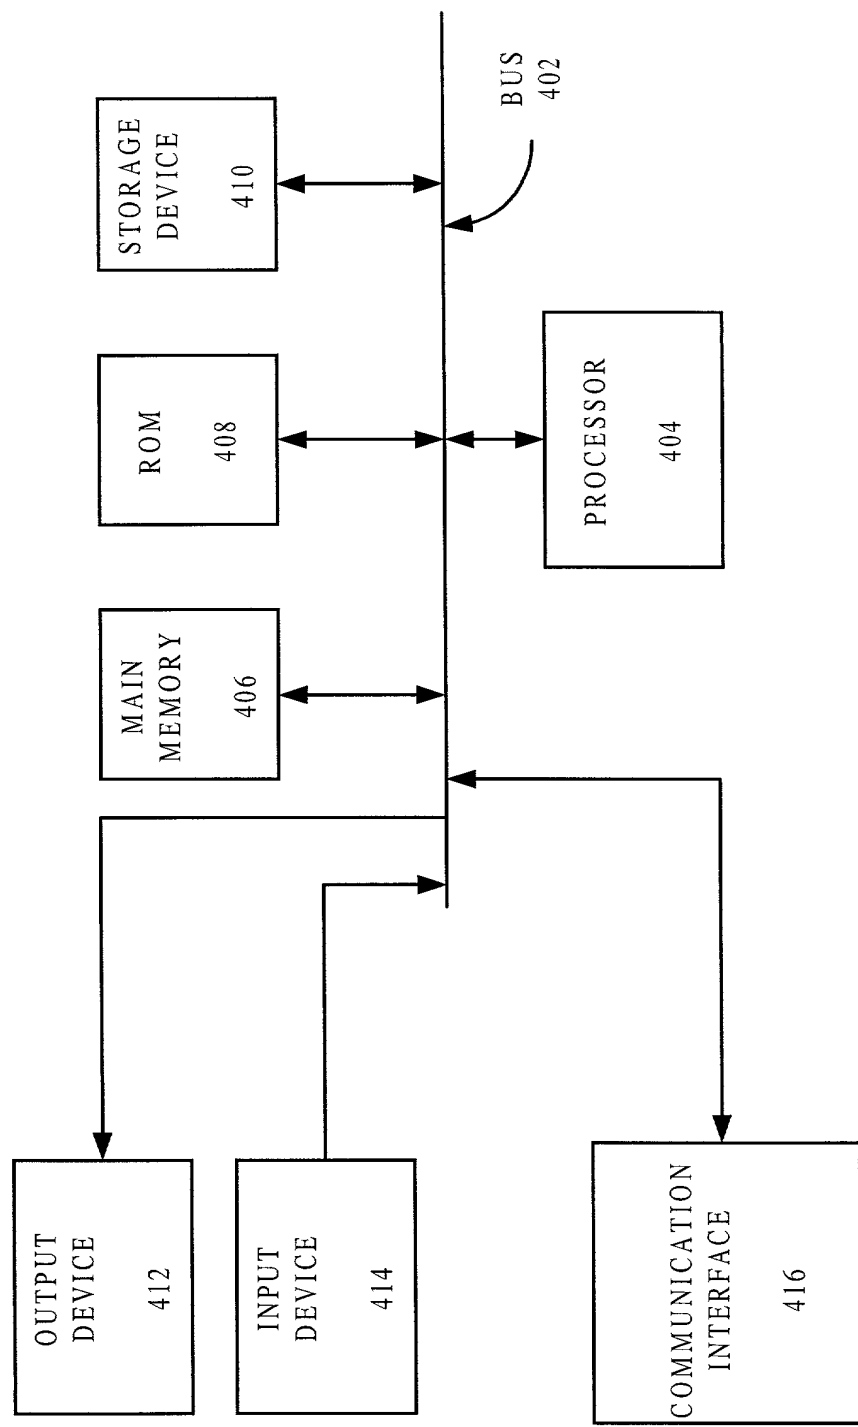


FIG. 4

500

NETWORK ELEMENT - ABCDEFG03H

FILE EDIT VIEW HELP

TYPE	NO	ST	AT	TIME	DATE	NE ID	DETAILED ALARM DESCRIPTION	ACK BY
PORT	1	E		18:34:29	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
LINE	2	A	PA	18:34:29	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	EH
PORT	1	E		18 34:28	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
LINE	1	AE		18:34:28	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
LINE	1	E		18:34:24	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
FIRE	5	E		18:34:22	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
LINE	4	E		18:34:01	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	BCO
LINE	2	A		18:33:58	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	

505

MOST RECENT ALARMS

LINE		E		18:34:49	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	
LINE		E		18:34:33	11/02/1999	ABCDEFG03H	ALARM DESCRIPTION	


510

FIG. 5

TROUBLE INFORMATION MATRIX													
FILE EDIT VIEW HELP													
NE	ID	ALARMS			MIN	INFO	TOTAL	TICKETS	HELD ALARMS	NOTES	IN	US	EA
		CR	MAJ	MIN									
ATM	ABCDEFG04H	21	98	20	10		149	21	3	2	1	4	2
FR	ABCDEFG03H	32	35	54	9		130	20		14		2	2
IP	ABCDEFG05H	0	0	0	95		95	25		4		1	
FR	ABCDEFG06H	0	0	0	87		87					1	
ATM	ABCDEFG07H	0	0	0	64		64					1	
ATM	ABCDEFG08H	0	20	0	0		20	2		1		1	
ATM	ABCDEFG09H	0	20	0	0		20	4				1	
IP	ABCDEFG10H	0	0	0	4		4					1	
IP	ABCDEFG11H	0	0	0	3		3	1				1	
ATM	ABCDEFG12H	0	0	0	1		1			1		1	

FIG. 6

710

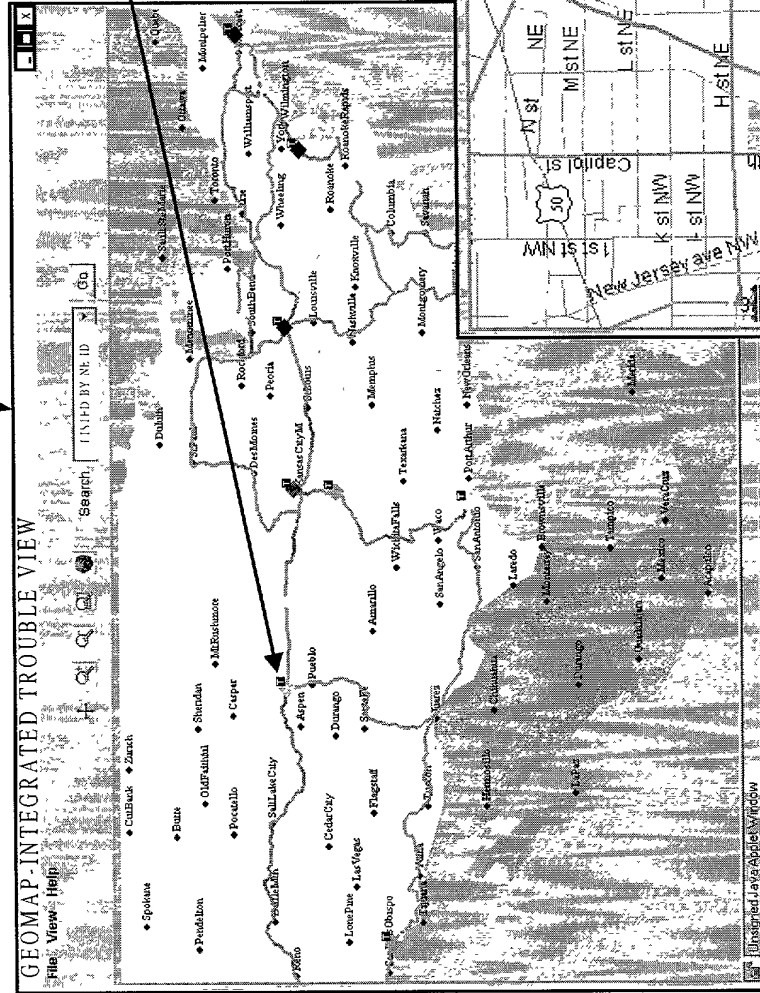

720

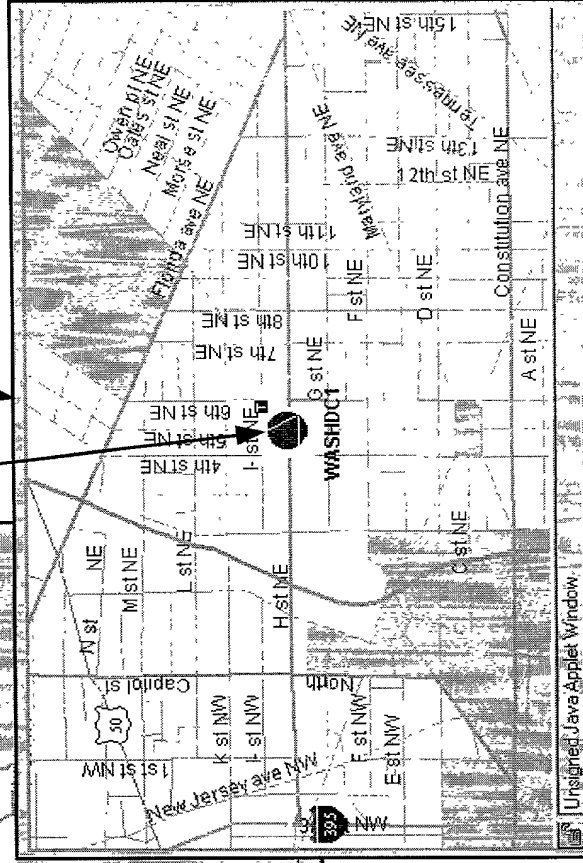


FIG. 7

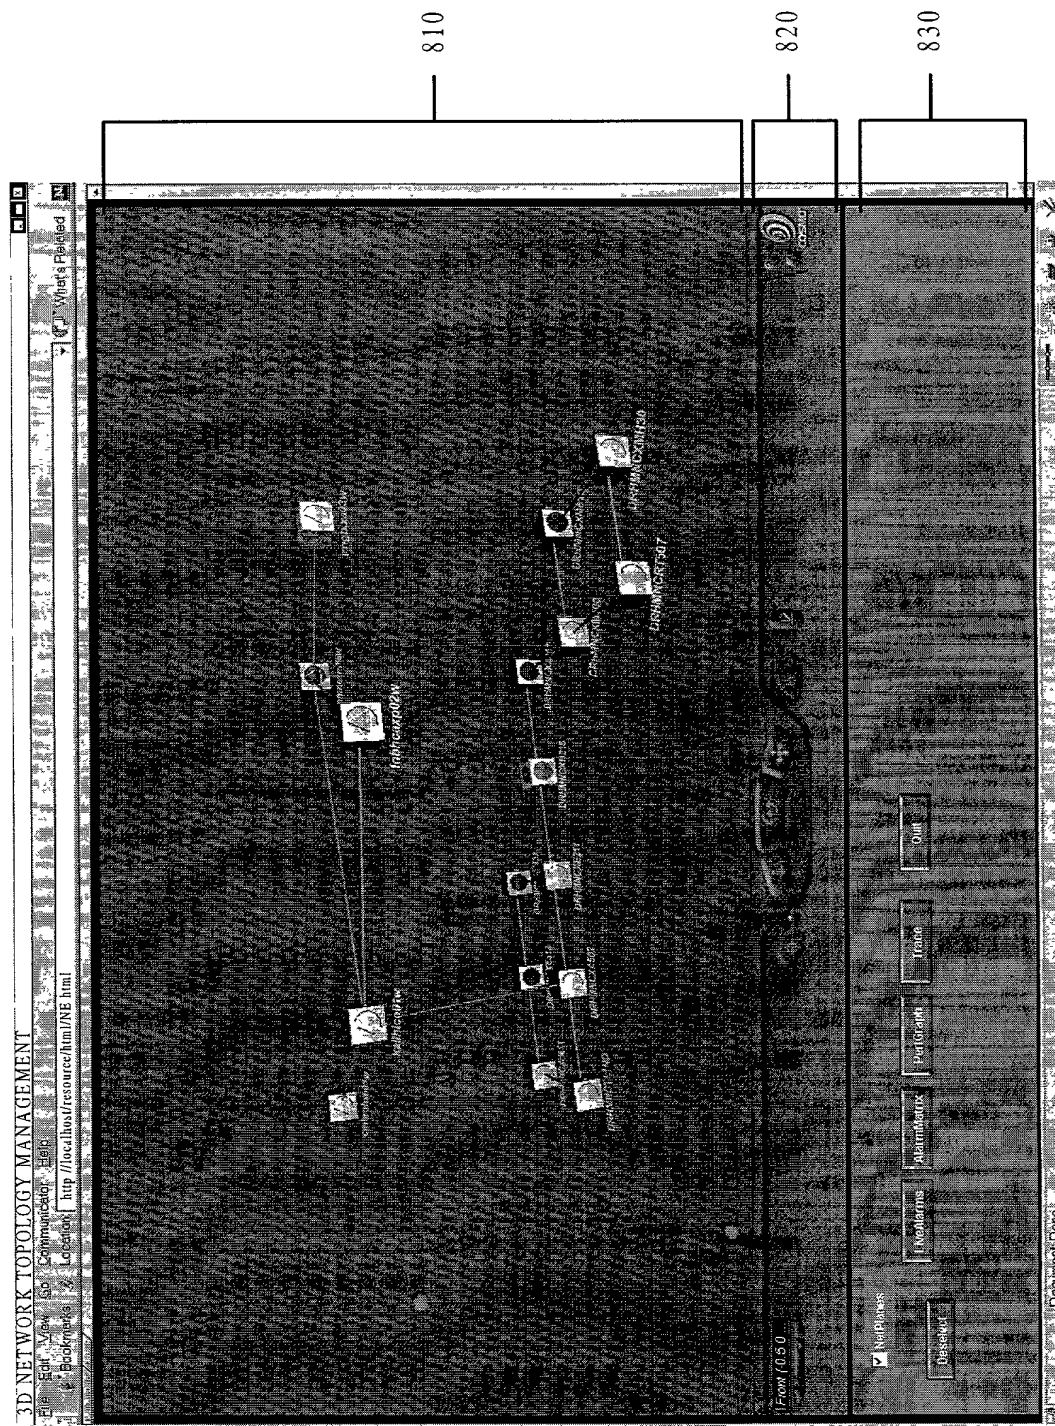


FIG. 8


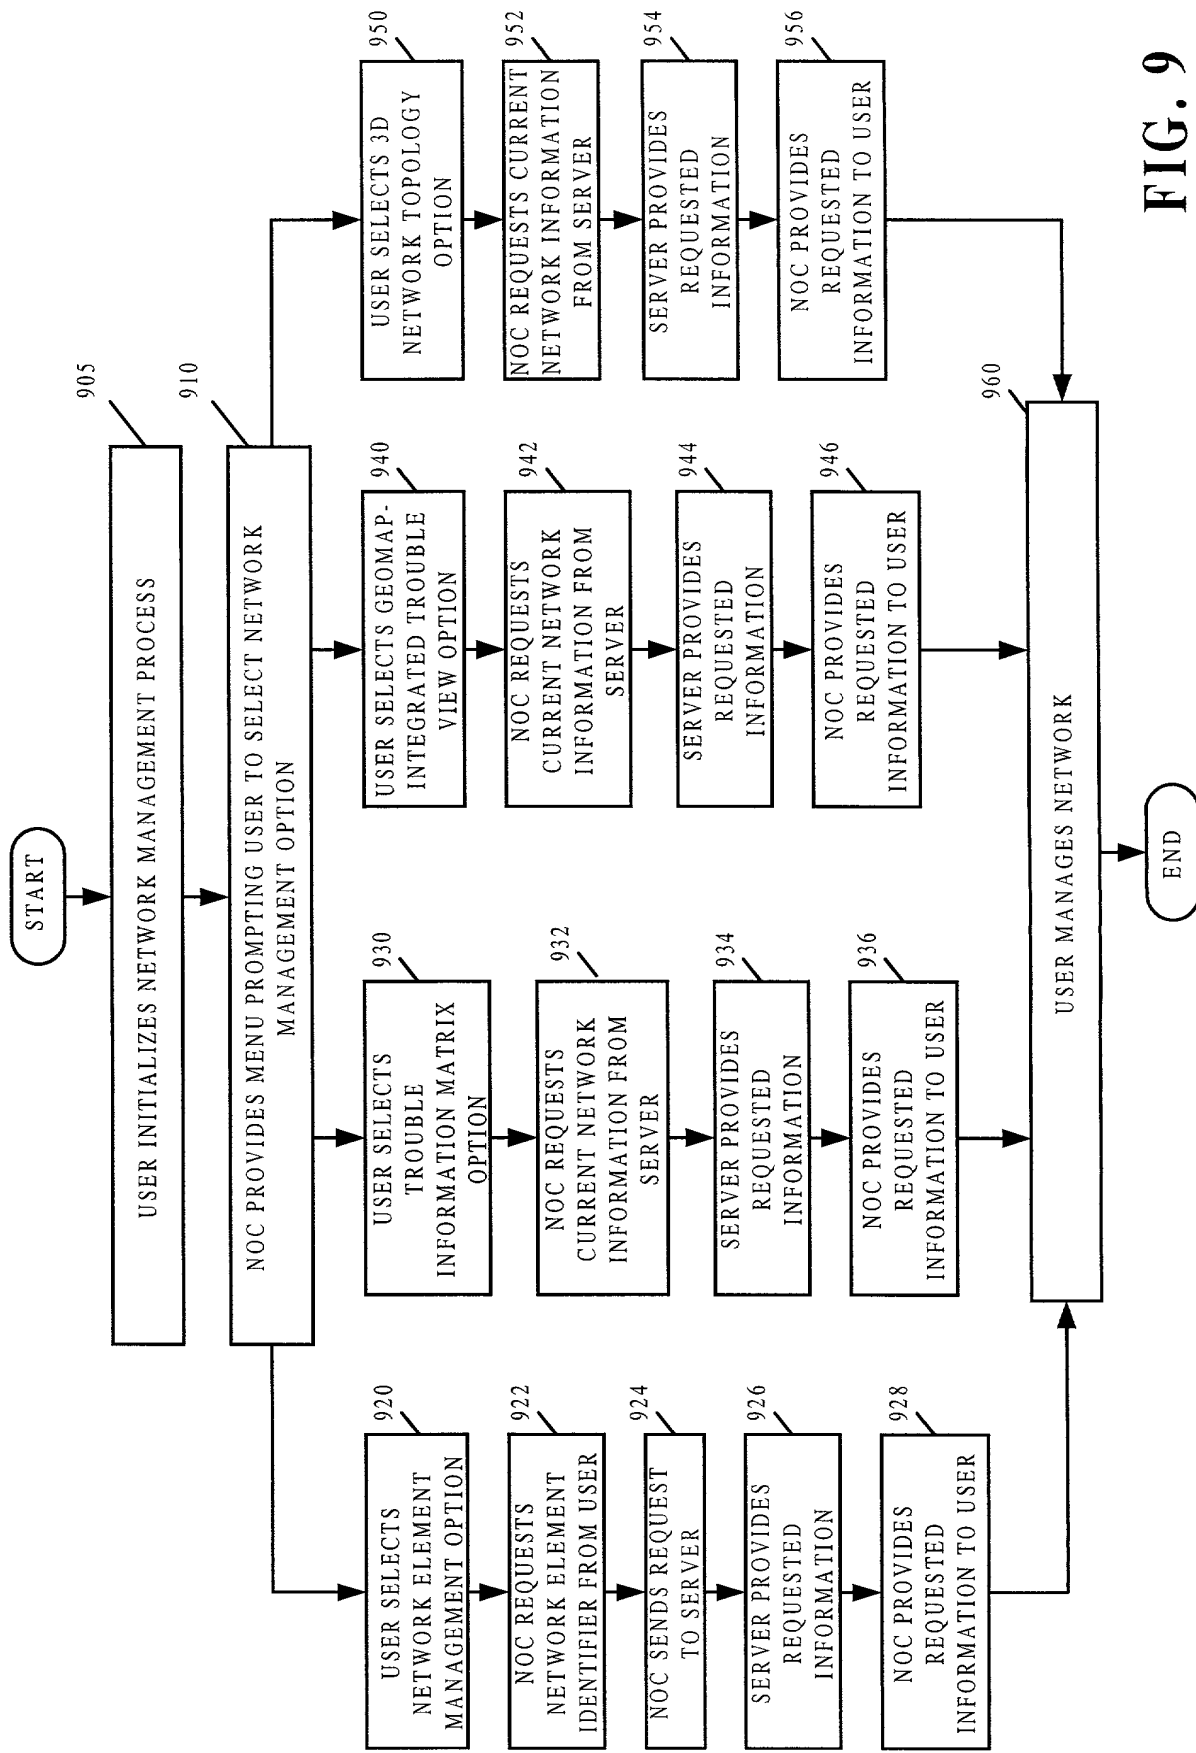


FIG. 9

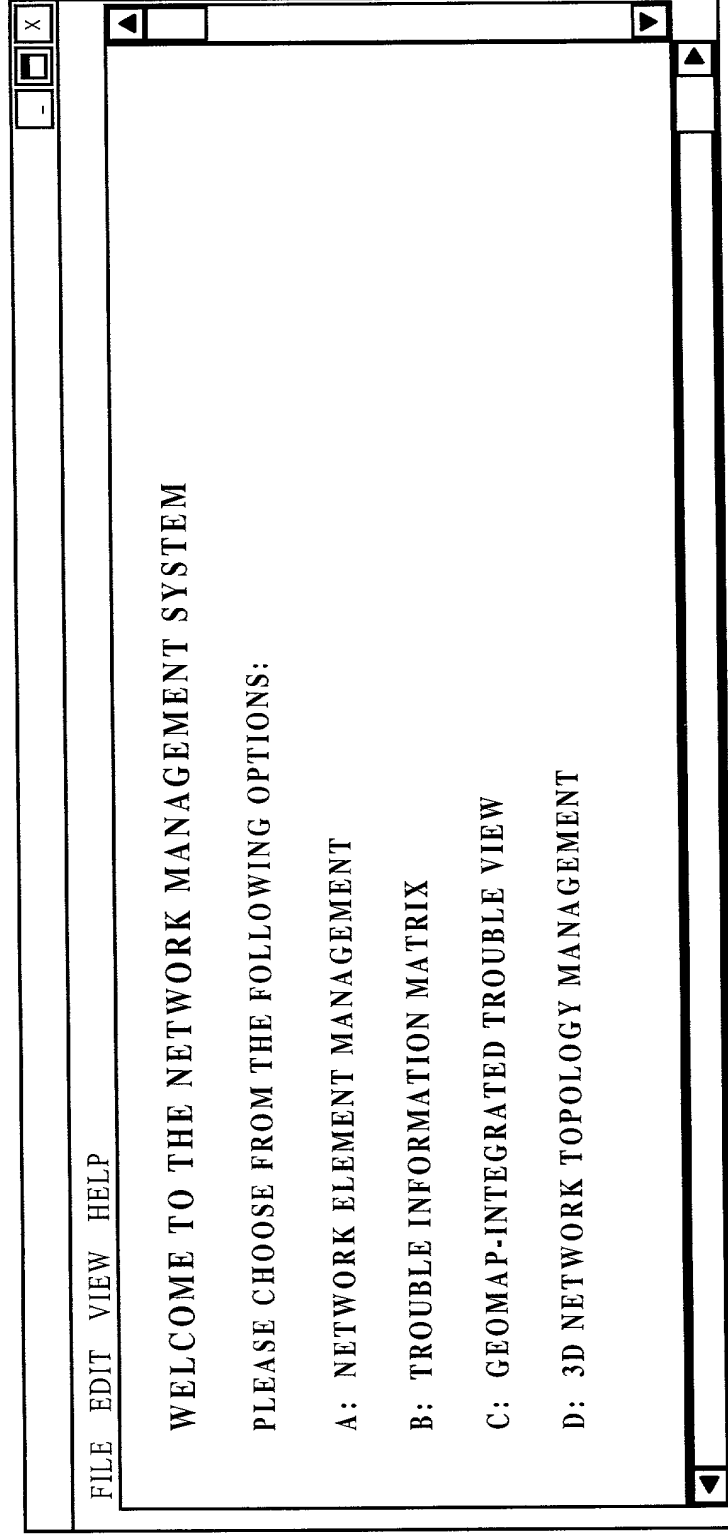

1000



**FIG. 10**

**DECLARATION AND POWER OF ATTORNEY FOR PATENT  
APPLICATION**

Attorney Docket No. 00-8008

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEMS AND METHODS FOR MANAGING FAULTS IN A NETWORK**

the specification of which (check one) ☒ [ X ] is attached hereto. ☐ [ ] was filed on  
as Appln. Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_  
( if applicable). I hereby state that I have reviewed and understand the contents of the above identified  
specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application  
in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign  
application(s) for patent or inventor's certificate listed below and have also identified any foreign  
application for patent or inventor's certificate having a filing date before that of the application on  
which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)

(Country)

(Day/Month/Year filed)

☐ [ \_ ] Yes ☐ [ \_ ] No

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional  
applications(s) listed below.

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States  
application(s) listed below and insofar as the subject matter of each of the claims of this application is  
not disclosed in the prior United States application in the manner provided by the first paragraph of Title  
35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined  
in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the  
prior application and the national or PCT international filing date for this application:

(Appln. Serial No.)

(Filing Date)

(Status--patented, pending, abandoned)

Attorney Docket No. 00-8008

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

**Leonard C. Suchyta, Reg. No. 25,707, and James Weixel, Reg. No. 44,399**

Address all telephone calls to James K. Weixel at telephone no. (781) 466-2220

Address all correspondence to Leonard C. Suchyta  
Verizon Services Group  
600 Hidden Ridge, HQE03G13  
Irving, TX 75038

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Weiya Luo

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Boxborough, Massachusetts Citizenship USA

Post Office Address 71 Cortland Ln., Boxborough, MA 01719

FULL NAME OF SECOND INVENTOR Anthony Wogrin Confrey

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Newton, Massachusetts Citizenship Irish

Post Office Address 25 Irving St., Newton, MA 02459

FULL NAME OF THIRD INVENTOR Michael J. Turok

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Peabody, Massachusetts Citizenship USA

Post Office Address 403 Foxwood Cir., Peabody, MA 01960

FULL NAME OF FOURTH INVENTOR Bruce Wilson

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Arlington, Massachusetts Citizenship USA

Post Office Address 183 Wright St., Arlington, MA 02474